




P550EK

POT WASHER

- Soft-Touch Electronic Control Panel with Digital Thermostats
- Counterbalanced Double-Wall Door
- Stainless Steel Upper and Lower Wash and Rinse Arms with Booster Pump
- 2 Integral tank filters
- Self-Washing Slanted Tank with Rounded Edges
- Double Wall Thermal and Acoustic Insulation
- Stainless Steel Washing Pump
- Rinsing Booster Pump
- Automatic tank loading
- Frontal control panel for easy maintenance
- Security Thermostat



POWER	208V 3PH, 7100W, 20A
RINSE-AID DISPENSER	Yes
CLEARANCE	33"
RACK CAPACITY (L X W)	20.5" x 22.8"
INCLUDED RACKS	1 x Stainless Steel basket
WORK HEIGHT	34"
TANK CAPACITY	34L / 9Gal
DIMENSIONS (L X W X H)	27" x 33.25" x 70.3"
WASH CYCLE DURATION	2 - 3 - 4 mins
WASH CYCLE CAPACITY	30 - 20 - 15 baskets/hr
WATER CONSUMPTION	3L per cycle / 0.8Gal per cycle 90 - 60 - 45L per hour / 23.8 - 16 - 12Gal per hour
ELECTRIC PUMP	1100W
RINSE PUMP	385W
WASH TANK ELEMENT	3000W
RINSE TANK ELEMENT	6000W
BOILER CAPACITY	8L / 2Gal
WATER INLET TEMPERATURE	55 - 60°C 131 - 140°F
WATER INLET CONNECTION	3/4"
WATER OUTLET CONNECTION	32 mm - 1" 1/4
INLET WATER PRESSURE	40 ± 80 psi
WATER HARDNESS	7.2 - 12.5°f
RINSE TEMPERATURE	82 - 90°C 175 - 194°F
NET WEIGHT	364 lbs
SHIP DIMENSIONS (L X W X H)	29" x 34" x 86"
SHIP WEIGHT	406 lbs
NOISE LEVEL	<70dB(A)

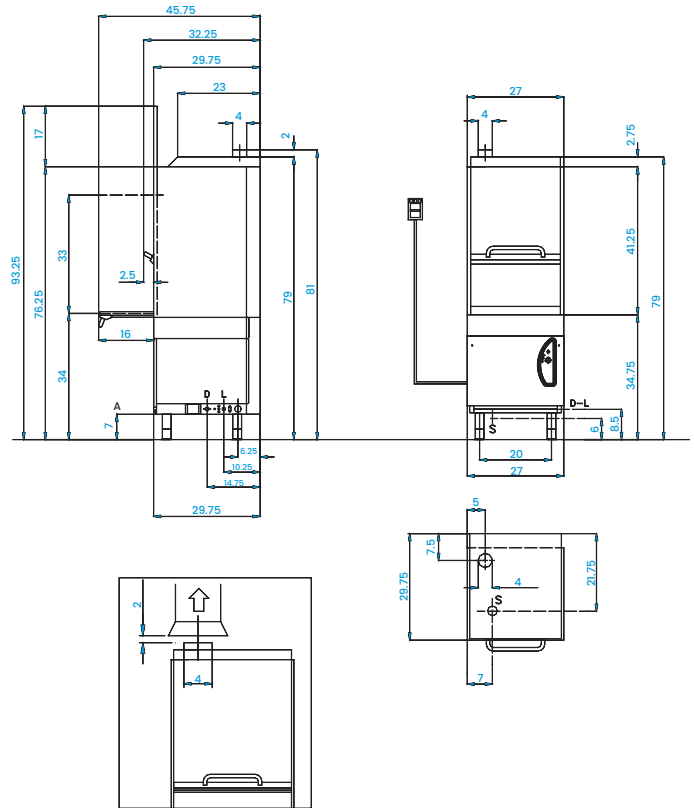

D	Hot Water Inlet
S	Drain
L	Electrical Connection
A	Max. Drain Height to Wall

WARRANTY: ONE YEAR PARTS AND LABOR