



**Your expert in vacuum solutions and sous-vide technology**

**Vacuum Packaging  
& Sous-vide Cooking Systems**

---

**Scale Saving**

**Food Saving**

**Workflow Optimization**

**Go to Market**

**Sous-Vide**



### **Domestic**

Elevate your culinary experience with sous-vide products at home.

### **Economy**

Budget conscious and proof of concept equipment for your food distribution project.

### **Premium**

Intelligent technological programming to make your gastronomic dreams a reality.

### **Industrial**

Efficient, robust units designed for repetitive, high-volume packaging.

# **There's an ATMOVAC product for you.**

Our products are manufactured to ensure quality and safety are never compromised.



**BPA-free**



Certifications vary by product

# Table of Contents

## **Vacuum Packaging**

5 Returns on Your Investment	4
How to Choose a Vacuum Machine	6
External Vacuum	8
Chamber Vacuum	
Domestic	10
Economy	11
Premium	12
Industrial	19
Seal Bar Configurations	26
Control Panels	28
Accessories	32
Vacuum Bags	
How to Choose a Vacuum Bag	38

## **Sous-vide Cooking**

Thermal Immersion Circulators	41
Integrated Baths	44

## **Impulse Sealers**

Manual	45
Freestanding	46

## **Hand Wrapper** 47

## **Get the Most Out of Your ATMOVAC Machines** 48

## **Tips / ATMOVAC Academy** 50

## 5 Returns on Your Investment



1. **Scale Saving** – own your packaging, portion to your needs, and save money on bulk purchases.



2. **Food Saving** – extend the shelf life of your foodstuff and increase the opportunity for a return on it.



3. **Workflow Optimization** – deliver a quality product day in and day out with fewer hands on deck.



4. **Go to Market** – expand your opportunities by reaching out to the market in new ways.



5. **Sous-Vide** – integrate the principles of Sous-Vide cooking to get the most out of your ingredients.





# How to choose your vacuum machine



1. **Size** will be the biggest determining factor, which is mainly dictated by the length of the sealing beam. This and the chamber depth/height may restrict the size of packaging you can process and cannot be changed during the ownership cycle.

Select a size that fits your current and projected needs as you grow your operation. You can also add a second seal beam in the chamber to increase production.



2. **Pump speed** controls the speed at which your machine operates. Determined according to chamber size, expressed in volume of air over time ( $\text{m}^3\text{h}$ ).

At the end of the day, if time is critical to your operation, going with a bigger pump will make a difference.





3. **Power configuration.** We offer units in numerous configurations from 110V to 208V/3PH. Make sure you have the necessary power to run the machine of your choice.
4. **Features.** We have everything from budget conscious units with basic programming features to premium manufactured machines with advanced technology. Are you looking for a simple packaging machine or are you looking to harness all the potential of vacuum technology in food processing?







# External Vacuum

Control panel details on page 27. Optional add-ons and Accessory details on page 32. Seal bar configuration on page 26.



## BURAN

External Vacuum machines from ATMOVAC provide the benefits of Vacuum Packaging and Sous-vide at a lower cost and footprint than chamber vacuum machines. These units, available in both domestic and commercial trim, will consistently deliver quality results in a compact and highly mobile format.

### FEATURES

- Vacuum Level HIGH/LOW, Seal, Pulse, Impulse, Accessory
- Quick-control buttons on handle (START/SEAL)
- Removable liquid collection tray - Dual piston pump
- Included: 10 channeled bags (8" x 12")
- 1 Accessory tube
- Warranty 1 year parts and labor
- Compatible with Channeled ATMOVAC bags and rolls
- Stainless Steel and ABS Plastic

### SPECS

Volts	110-120V
Watts	550W
Amps	4.6A
NEMA	5-15P
Standard Speed	0.96 m³/h
Seal Bar	16"
Dimension L	19.3"
Dimension W	10.25"
Dimension H	5.5"
Net Weight	11.5 lbs
Approvals	cETLus



Our DIABLO line is designed with the belief that everyone should have access to the benefits of vacuum packaging. Commercial-grade built for culinary use with simple interface, these plug and play units get the job done at any budget. Stainless Steel body, aluminum chamber.



DIABLO

10 — 12



12D27G

FEATURES

- Simple, time-based controls (Vacuum, Seal)

Warranty

1 year parts and labor
- Compatible with All types of ATMOVAC Vacuum Bags

Control panel details on page 28-29. Optional add-ons and Accessory details on page 32. Seal bar configuration on page 26.

Cycle duration: 30-40 sec

SPECS —

DIABLO 10		DIABLO 12		DIABLO 12D27G	
Marinate	Yes	Marinate	Yes	Marinate	Yes
Gas Injection	No	Gas Injection	No	Gas Injection	Yes
Volts	120V	Volts	120V	Volts	120V
Watts	1000W	Watts	950W	Watts	2355W
Amps	8.3A	Amps	8A	Amps	21.5A
NEMA	5-15P	NEMA	5-15P	NEMA	5-20P
Standard Speed	8 m³/h	Standard Speed	8 m³/h	Standard Speed	24 m³/h
Seal Bar	10"	Seal Bar	10"	Seal Bar	2 x 12.5", 1 x 27"
Chamber Dimension L	15.5"	Chamber Dimension L	13.8"	Chamber Dimension L	33.2"
Chamber Dimension W	11"	Chamber Dimension W	11.8"	Chamber Dimension W	17.5"
Chamber Dimension H	3"	Chamber Dimension H	3"	Chamber Dimension H	6.6"
Dimension L	19"	Dimension L	16.7"	Dimension L	37"
Dimension W	13"	Dimension W	14"	Dimension W	22.9"
Dimension H	14.2"	Dimension H	14.5"	Dimension H	18.6"
Net Weight	60 lbs	Net Weight	64 lbs	Net Weight	209.4 lbs
Approvals	cETLus	Approvals	cETLus	Approvals	cETLus





17D



20D

FEATURES

- Simple, time-based controls (Vacuum, Seal)

Warranty

1 year parts and labor
- Compatible with All types of ATMOVAC Vacuum Bags

Control panel details on page 28-29. Optional add-ons and Accessory details on page 32. Seal bar configuration on page 26.

Cycle duration: 30-40 sec

SPECS —

DIABLO 17D		DIABLO 20D	
Marinate	No	Marinate	No
Gas Injection	No	Gas Injection	Yes
Volts	120V	Volts	120V
Watts	1180W	Watts	1180W
Amps	9.8A	Amps	9.8A
NEMA	5-15P	NEMA	5-15P
Standard Speed	24 m³h	Standard Speed	24 m³h
Seal Bar	2 x 17"	Seal Bar	2 x 20"
Chamber Dimension L	18"	Chamber Dimension L	21.3"
Chamber Dimension W	16.8"	Chamber Dimension W	20.7"
Chamber Dimension H	3.9"	Chamber Dimension H	3.9"
Dimension L	22.3"	Dimension L	25.7"
Dimension W	19.5"	Dimension W	23.6"
Dimension H	18.6"	Dimension H	40"
Net Weight	132.5 lbs	Net Weight	242.5 lbs
Approvals	cETLus	Approvals	cETLus
		Freestanding unit on wheels	







## PREMIUM VACUUM MACHINES

European manufacturing in a range of sizes, seal beam configurations, advanced technological features, and an array of customizable options.

Reliability and repeatability are essential to your business. We provide control and precision when you need it most.

### ACS CONTROL PANEL

Standard on all ATMOVAC premium+ vacuum machines

With simple-to-use culinary programs and traceability features, our premium+ models harness technology to offer you food processing beyond simple packaging. Set your programs and the machine does the rest.

**Configure your cycle programs using the LCD panel or online ACS Configurator**



[www.acs-configurator.com](http://www.acs-configurator.com)

### STANDARD FEATURES OF ACS

- Sensor control
- Double seal
- Liquid control
- LCD panel
- 20-program memory
- Software in 5 languages
- USB connection to upload programs
- Label printer compatibility
- HACCP compliance
- Secured multi-level access
- Online programming

KAZE perfectly balances ease-of-use, sturdy construction and advanced technology. Simple control panel with graphic display. Seamless welding design. Precise vacuum settings with sensor pressure control. Liquid Control. Comprehensive maintenance menu. Service alarm.

**KAZE****14****16****16XL****16XLD**

## FEATURES

Liquid control INCLUDED with all KAZE machines, in addition to: 3-program memory, Sensor control, Soft air, Double seal, Red meat packaging, Pump cleaning cycle

Warranty

1 year labor  
3 years parts  
(excludes pumps, Teflon seal tape and gaskets)

Compatible with All types of  
ATMOVAC Vacuum Bags

Control panel details on page 29.  
Optional add-ons and Accessory  
details on page 32. Seal bar  
configuration on page 26.

## OPTIONAL ADD-ONS

Cut-off/wide seal (0.3")

External vacuum adapter



## SPECS —

KAZE 14		KAZE 16		KAZE 16XL		KAZE 16XLD	
Cycle duration	35 sec	Cycle duration	30 sec	Cycle duration	30 sec	Cycle duration	30 sec
Volts	120V	Volts	120V	Volts	120V	Volts	120V
Watts	960W	Watts	1600W	Watts	1760W	Watts	1760W
Amps	8A	Amps	17A	Amps	17A	Amps	17A
NEMA	5-15P	NEMA	5-15P	NEMA	5-20P	NEMA	5-20P
Standard Speed	10 m <sup>3</sup> /h	Standard Speed	19 m <sup>3</sup> /h	Standard Speed	25 m <sup>3</sup> /h	Standard Speed	25 m <sup>3</sup> /h
Seal Bar	14"	Seal Bar	16.5"	Seal Bar	16.5"	Seal Bar	2 x 16.5"
Chamber Dimension L	14.6"	Chamber Dimension L	14.6"	Chamber Dimension L	18"	Chamber Dimension L	16"
Chamber Dimension W	14"	Chamber Dimension W	16.5"	Chamber Dimension W	16.5"	Chamber Dimension W	16.5"
Chamber Dimension H	6"	Chamber Dimension H	7"	Chamber Dimension H	7"	Chamber Dimension H	7"
Dimension L	21.4"	Dimension L	20.6"	Dimension L	24"	Dimension L	24"
Dimension W	17.8"	Dimension W	19.3"	Dimension W	19.3"	Dimension W	19.3"
Dimension H	18"	Dimension H	18.3"	Dimension H	18.5"	Dimension H	18.5"
Net Weight	79 lbs	Net Weight	126 lbs	Net Weight	150 lbs	Net Weight	159 lbs
Approvals	cETLus, NSF	Approvals	cETLus, NSF	Approvals	cETLus, NSF	Approvals	ccETLus, NSF





Our CHINOOK series is durable and highly customizable. Its versatility makes it capable of responding to a variety of needs and applications. Stainless Steel Exterior and Interior Chamber.

# CHINOOK



14



16D



20

## STANDARD CONTROL PANEL

10-program memory  
% Vacuum  
VAC+  
Seal time  
Soft air  
Pump cleaning cycle

Compatible with All types of ATMOVAC Vacuum Bags  
Control panel details on page 30. Optional add-ons, Accessory and Service Kit details on page 32. Seal bar configuration on page 26.  
Cycle duration: 15-35 sec

## OPTIONAL ADD-ONS

Gas flush  
Liquid control

## FEATURES

Sensor control  
Double seal  
Warranty 1 year labor  
3 years parts  
(excludes pumps, Teflon seal tape and gaskets).

## SPECS —

### CHINOOK 14

Volts	120V
Watts	960W
Amps	8A
NEMA	5-15P
Standard Speed	10 m³/h
Seal Bar	14"
Chamber Dimension L	14.5"
Chamber Dimension W	13.5"
Chamber Dimension H	6"
Dimension L	21.75"
Dimension W	17.75"
Dimension H	16"
Net Weight	117 lbs
Approvals	cETLus, NSF

### CHINOOK 16D

Volts	120V
Watts	1760W
Amps	17A
NEMA	5-20P
Standard Speed	25 m³/h
Seal Bar	2 x 16"
Chamber Dimension L	16"
Chamber Dimension W	20.5"
Chamber Dimension H	7"
Dimension L	20.75"
Dimension W	27.5"
Dimension H	17.25"
Net Weight	179 lbs
Approvals	cETLus, NSF

### CHINOOK 20

Volts	120V
Watts	1760W
Amps	17A
NEMA	5-20P
Standard Speed	25 m³/h
Seal Bar	20"
Chamber Dimension L	20.5"
Chamber Dimension W	24.5"
Chamber Dimension H	7"
Dimension L	20.75"
Dimension W	27.5"
Dimension H	17.25"
Net Weight	179 lbs
Approvals	cETLus, NSF





ACS CONTROL PANEL

- 20-program memory

% Vacuum

VAC+

Seal time

Soft air

Liquid control
- Marinating

Tenderizing

Red meat

Sequential vacuum

Pump cleaning cycle

Compatible with All types of ATMOVAC Vacuum Bags

Control panel details on page 31. Optional add-ons, Accessory and Service Kit details on page 32. Seal bar configuration on page 26.

Cycle duration: 15-35 sec

OPTIONAL ADDS-ON

- Gas flush
- Liquid control

ACS FEATURES

- Sensor control
- Double seal
- LCD panel
- Software in 5 languages
- USB connection
- Label printer compatibility
- HACCP compliance
- Secured multi-level access
- Online programming
- Warranty

1 year labor

3 years parts

(excludes pumps, Teflon seal tape and gaskets).

SPECS —

CHINOOK 14+		CHINOOK 16+		CHINOOK 16D+	
Volts	120V	Volts	120V	Volts	120V
Watts	950W	Watts	1760W	Watts	1760W
Amps	8A	Amps	17A	Amps	17A
NEMA	5-15P	NEMA	5-20P	NEMA	5-20P
Standard Speed	10 m³h	Standard Speed	25 m³h	Standard Speed	25 m³h
Seal Bar	14"	Seal Bar	16"	Seal Bar	2 x 16"
Chamber Dimension L	14.5"	Chamber Dimension L	18"	Chamber Dimension L	16"
Chamber Dimension W	13.5"	Chamber Dimension W	16.5"	Chamber Dimension W	20.5"
Chamber Dimension H	6"	Chamber Dimension H	7"	Chamber Dimension H	7"
Dimension L	21.75"	Dimension L	24.25"	Dimension L	20.75"
Dimension W	17.75"	Dimension W	19.5"	Dimension W	27.5"
Dimension H	16"	Dimension H	17.25"	Dimension H	17.25"
Net Weight	117 lbs	Net Weight	156 lbs	Net Weight	179 lbs
Approvals	cETLus, NSF	Approvals	cETLus, NSF	Approvals	cETLus, NSF

Our CYCLONE series delivers results when time is of the essence. Oversized pumps and large vacuum chambers speed up production and maximize output capacity. Stainless Steel Exterior and Interior Chamber.



CYCLONE

203D

### STANDARD CONTROL PANEL

10-program memory  
% Vacuum  
VAC+  
Seal time  
Soft air  
Pump cleaning cycle

Compatible with All types of ATMOVAC Vacuum Bags

Control panel details on page 31. Optional add-ons, Accessory and Service Kit details on page 32. Seal bar configuration on page 26.

Cycle duration: 15-35 sec

### ACS PANEL AVAILABLE AS ADD-ON, INCLUDING

LCD panel	Online Programming
Software in 5 languages	Marinating
20-program memory	Tenderizing
USB Connection	Red Meat Packaging
Label Printer Compatibility	Sequential Vacuum
HACCP compliance	Liquid Control
Secured, multi-level access	

### SPECS — CYCLONE 203D

Volts	208V 3PH
Watts	2500W
Amps	18A
NEMA	L15-30P
Standard Speed	75 m <sup>3</sup> /h
Seal Bar	2 x 20.5"
Chamber Dimension L	20.5"
Chamber Dimension W	19.7"
Chamber Dimension H	7.9"
Dimension L	28"
Dimension W	27.4"
Dimension H	40.4"
Net Weight	364 lbs
Approvals	cETLus, NSF

### FEATURES

Sensor control  
Double seal  
Warranty 1 year labor  
3 years parts  
(excludes pumps,  
Teflon seal tape  
and gaskets).

### OPTIONAL ADD-ONS

Gas flush  
Liquid control





# CYCLONE



203D+



201D48

Control panel details on page 31. Optional add-ons, Accessory and Service Kit details on page 30. Seal bar configuration on page 26.

Compatible with All types  
of ATMOVAC Vacuum Bags  
Cycle duration 15-35 sec

SPECS —  
CYCLONE 203D+

Volts	208V 3PH
Watts	2500W
Amps	18A
NEMA	L15-30P
Standard Speed	75 m <sup>3</sup> /h
Seal Bar	2 x 20.5"
Chamber Dimension L	20.5"
Chamber Dimension W	19.7"
Chamber Dimension H	7.9"
Dimension L	28"
Dimension W	27.4"
Dimension H	40.4"
Net Weight	364 lbs
Approvals	cETLus, NSF



CYCLONE 201D48

Volts	208V 3PH
Watts	2500W
Amps	18A
NEMA	L15-30P
Standard Speed	75 m <sup>3</sup> /h
Seal Bar	2 x 20.5"
Chamber Dimension L	20.5"
Chamber Dimension W	19.7"
Chamber Dimension H	7.9"
Dimension L	28"
Dimension W	27.4"
Dimension H	40.4"
Net Weight	364 lbs
Approvals	cETLus, NSF



ACS CONTROL  
PANEL  
only for  
CYCLONE 203D+

- 20-program memory
- % Vacuum
- VAC+
- Seal time
- Soft air
- Liquid control
- Marinating
- Tenderizing
- Red meat
- Sequential vacuum
- Pump cleaning cycle



ACS FEATURES

- Sensor control
- Double seal
- LCD panel
- Software in 5 languages
- USB connection
- Label printer compatibility
- HACCP compliance
- Secured multi-level access
- Online programming
- Warranty
  - 1 year labor
  - 3 years parts (excludes pumps, Teflon seal tape and gaskets).

OPTIONAL  
ADD-ON

- Gas flush

Maximize your productivity with PAMPERO. Floor model units available in either single or double chamber configurations. Stainless Steel housing, aluminum vacuum chamber and aluminum lid with sight glass.

Replaces Falcon 80. Control panel details on page 30.  
Optional add-ons and Accessory details on page 32.  
Seal bar configuration on page 26.



# PAMPERO 30/20D3

## STANDARD CONTROL PANEL

- 10-program memory
- % Vacuum
- VAC+
- Seal time
- Soft air
- Pump cleaning cycle

## FEATURES

- Sensor control
  - Double seal
  - High lid (9.25")
  - Removable silicone holders
  - Insert plates included
  - Warranty
    - 1 year labor
    - 3 years parts (excludes pumps, Teflon seal tape and gaskets).
- OPTIONAL ADD-ONS
- Soft air
  - Liquid control
  - ACS
  - Gas flush
  - Cut-off seal
  - 1-2 Cut-off seal
  - Wide seal (0.39")
  - Bi-active seal
  - Seal bar configuration (2 x 22" left/right), (2 x 31.8" front/back), or add a 3<sup>rd</sup> seal bar (2 x 20" left/right, 27.6" front)

Compatible with All types of ATMOVAC Vacuum Bags  
Cycle duration: 15-40 sec  
Visit our website or contact us for more information on our wide offering of highly customizable industrial vacuum machines.

## SPECIAL FEATURE

Sealing bars in "L" configuration

## SPECS

Volts	208V 3PH
Watts	3400W
Amps	16A
NEMA	L15-30P
Standard Speed	120 m³/h
Seal Bar	1 x 30" (front) 1 x 20" (right)
Chamber Dim. L	20"
Chamber Dim. W	30"
Chamber Dim. H	9.25"
Dimension L	32.25"
Dimension W	35.5"
Dimension H	41.25"
Net Weight	500 lbs
Approvals	cETLus



PAMPERO



2-22D3



2-22D3 G

Control panel details on page 30. Optional add-ons and Accessory details on page 32. Seal bar configuration on page 26.

Compatible with All types of ATMOVAC Vacuum Bags  
Cycle duration: 15-40 sec  
Visit our website or contact us for more information on our wide offering of highly customizable industrial vacuum machines.

SPECS —

PAMPERO 2-22D3

Volts	208V 3PH
Watts	3400W
Amps	21A
NEMA	L15-30P
Standard Speed	120 m³/h
Seal Bar	2 x 21.7"
Chamber Dimension L	2 x 27.6"
Chamber Dimension W	2 x 21.7"
Chamber Dimension H	2 x 9.25"
Dimension L	40"
Dimension W	49.5"
Dimension H	46.7"
Net Weight	703 lbs
Approvals	cETLus

PAMPERO 2-22D3G

Volts	208V 3PH
Watts	3400W
Amps	21A
NEMA	L15-30P
Standard Speed	120 m³/h
Seal Bar	2 x 21.7"
Chamber Dimension L	2 x 27.6"
Chamber Dimension W	2 x 21.7"
Chamber Dimension H	2 x 9.25"
Dimension L	40"
Dimension W	49.5"
Dimension H	46.7"
Net Weight	705 lbs
Approvals	cETLus

CONTROL  
PANEL

10-program memory  
% Vacuum  
VAC+  
Seal time  
Soft air  
Pump cleaning cycle

FEATURES

Sensor control  
Double seal  
High lid (9.25")  
Removable silicone holders  
Insert plates included  
Warranty 1 year labor  
3 years parts  
(excludes pumps, Teflon seal tape and gaskets).

SPECIAL  
FEATURES

Liquid control  
Soft air  
(2) Vacuum chambers

OPTIONAL  
ADD-ONS

ACS  
Gas flush  
Cut-off seal  
1-2 Cut-off seal  
Wide seal (0.39")  
Bi-active seal







PAMPERO 30/20D3 2-18D3

Compatible with All types of ATMOVAC Vacuum Bags  
Control panel details on page 30. Optional add-ons and Accessory details on page 32. Seal bar configuration on page 26.  
Cycle duration: 15-40 sec  
Visit our website or contact us for more information on our wide offering of highly customizable industrial vacuum machines.

STANDARD CONTROL PANEL

- 10-program memory
- % Vacuum
- VAC+
- Seal time
- Soft air
- Pump cleaning cycle

FEATURES

- Sensor control
- Double seal
- High lid (9.25")
- Removable silicone holders
- Insert plates included
- Warranty
  - 1 year labor
  - 3 years parts (excludes pumps, Teflon seal tape and gaskets).

OPTIONAL ADD-ONS

- Soft air
- Liquid control
- ACS
- Gas flush
- Cut-off seal
- 1-2 Cut-off seal
- Wide seal (0.39")
- Bi-active seal
- Seal bar configuration (2 x 26.8" left/right)  
Available only on Pampero 2-18D3

SPECS — PAMPERO 30/20D3

Vacuum chambers	1
Volts	208V 3PH
Standard Speed	75 m³/h
Seal Bar	2 x 20.5"
Chamber Dimension L	20.5"
Chamber Dimension W	19.7"
Chamber Dimension H	9.25"
Dimension L	27.4"
Dimension W	26.9"
Dimension H	41.7"
Net Weight	359 lbs
Approvals	cETLus

PAMPERO 2-18D3

Vacuum chambers	2
Volts	208V 3PH
Standard Speed	75 m³/h
Seal Bar	2 x 17.7" in each chamber
Chamber Dimension L	22.8"
Chamber Dimension W	17.7"
Chamber Dimension H	9.25"
Dimension L	35.4"
Dimension W	41.7"
Dimension H	46.4"
Net Weight	520 lbs
Approvals	cETLus



Electrical information available upon request.  
May vary with customizations.

SOLAR is the ultimate solution for MAP and vacuum packaging with full HACCP compatibility. The smart design and hygienic construction ensures reliability in operation and low maintenance costs. Stainless steel series with a flat work plate.



# SOLAR 2-24D3W

Replaces Polar 2-50. Control panel details on page 30.  
Optional add-ons and Accessory details on page 32.  
Seal bar configuration on page 26.

## STANDARD CONTROL PANEL

- 10-program memory
- % Vacuum
- VAC+
- Seal time
- Soft air
- Pump cleaning cycle

Compatible with All types of ATMOVAC Vacuum Bags  
Visit our website or contact us for more information on our wide offering of highly customizable industrial vacuum machines.  
Cycle duration: 15-40 sec

## SPECS

Volts	208V 3PH
Watts	3400W
Amps	24A
NEMA	L15-30P
Standard Speed	120 m³h
Seal Bar	2 x 24.4"
Chamber Dim. L	2 x 19.7"
Chamber Dim. W	2 x 24.4"
Chamber Dim. H	2 x 9.4"
Dimension L	36.2"
Dimension W	58.3"
Dimension H	52.2"
Net Weight	761 lbs
Approvals	cETLus

## FEATURES

- Sensor control
- Double seal
- Removable silicone holders
- Insert plates included
- Warranty
  - 1 year labor
  - 3 years parts (excludes pumps, Teflon seal tape and gaskets).

## SPECIAL FEATURES

- (2) Flat work surfaces
- Swinging lid
- (2) Sealing bars per work surface
- High lid (9.4")
- IP-65 classification

## OPTIONAL ADD-ONS

- Liquid control
- ACS
- Gas flush
- Cut-off seal
- 1-2 Cut-off seal
- Wide seal (0.39")
- Bi-active seal
- External pump configuration
- Heating element for vacuum valve





# SOLAR 20D3 30/20D3 41/24D3

## STANDARD CONTROL PANEL

10-program memory  
% Vacuum  
VAC+  
Seal time  
Soft air  
Pump cleaning cycle

## FEATURES

Sensor control  
Double seal  
Removable silicone holders  
Insert plates included  
Warranty 1 year labor  
3 years parts  
(excludes pumps,  
Teflon seal tape  
and gaskets).

## OPTIONAL ADD-ONS

Liquid control  
ACS  
Gas flush  
Cut-off seal  
1-2 Cut-off seal  
Wide seal (0.39")  
Bi-active seal  
External pump configuration

Compatible with All types of ATMOVAC Vacuum Bags

Control panel details on page 30. Optional add-ons and Accessory details on page 32. Seal bar configuration on page 26.

Visit our website or contact us for more information on our wide offering of highly customizable industrial vacuum machines.

Cycle duration: 15-40 sec

## SPECIAL FEATURES

Flat work surface  
IP-65 classification

## SPECS —

SOLAR 20D3		SOLAR 30/20D3		SOLAR 41/24D3	
High lid	7.9"	High lid	7.9"	High lid	11"
Volts	208V 3PH	Volts	208V 3PH	Volts	208V 3PH
Standard Speed	75 m³/h	Standard Speed	120 m³/h	Standard Speed	190 m³/h
Seal Bar	2 x 20.5"	Seal Bar	1 x 30" (front) 1 x 20" (right)	Seal Bar	1 x 41.3" (front) 1 x 24.4" (right)
		Seal Bar configuration	in "L" (front-back, left-right) or add a 3 <sup>rd</sup> seal bar	Seal Bar configuration	in "L" (front-back, left-right) or add a 3 <sup>rd</sup> seal bar (left, front, right)
Extra high contra bar	No	Extra high contra bar	Yes	Extra high contra bar	No
Heating element for vacuum valve	No	Heating element for vacuum valve	No	Heating element for vacuum valve	Yes
Chamber Dimension L	20.5"	Chamber Dimension L	20"	Chamber Dimension L	24.4"
Chamber Dimension W	19.7"	Chamber Dimension W	30"	Chamber Dimension W	41.3"
Chamber Dimension H	7.9"	Chamber Dimension H	7.9"	Chamber Dimension H	11"
Dimension L	29"	Dimension L	31"	Dimension L	37.3"
Dimension W	27.6"	Dimension W	35.4"	Dimension W	47.2"
Dimension H	43.3"	Dimension H	43.3"	Dimension H	45.3"
Net Weight	403.5 lbs	Net Weight	547 lbs	Net Weight	1025 lbs
Approvals	cETLus	Approvals	cETLus	Approvals	cETLus

OPTIONAL ADD-ONS

Electrical information available upon request. May vary with customizations.



Made in the Netherlands



SOLAR

2-24D32-24D3EW2-33D32-43D3

STANDARD  
CONTROL PANEL

- 10-program memory
- % Vacuum
- VAC+
- Seal time
- Soft air
- Pump cleaning cycle

Compatible with All types of ATMOVAC Vacuum Bags

Control panel details on page 30. Optional add-ons and Accessory details on page 32. Seal bar configuration on page 26.

Visit our website or contact us for more information on our wide offering of highly customizable industrial vacuum machines.

FEATURES

- Sensor control
- Double seal
- Removable silicone holders
- Insert plates included
- Warranty
  - 1 year labor
  - 3 years parts (excludes pumps, Teflon seal tape and gaskets).

SPECIAL  
FEATURES

- (2) Flat work surfaces
- Swinging lid
- (2) sealing bars per work surface
- IP-65 classification

OPTIONAL  
ADD-ONS

- Liquid control
- ACS
- Gas flush
- Cut-off seal
- 1-2 Cut-off seal
- Wide seal (0.39")
- Bi-active seal
- External pump configuration
- Heating element for vacuum valve

SPECS —

SOLAR 2-24D3		SOLAR 2-24D3EW		SOLAR 2-33D3		SOLAR 2-43D3	
High lid	9.4"	High lid	9.8"	High lid	10"	High lid	11"
Cycle duration	15-40 sec	Cycle duration	15-40 sec	Cycle duration	10-30 sec	Cycle duration	15-40 sec
Standard Speed	75 m³h	Standard Speed	190 m³h	Standard Speed	360 m³h	Standard Speed	360 m³h
Seal Bar	2 x 24.4"	Seal Bar	2 x 24.4"	Seal Bar	2 x 33"	Seal Bar	2 x 43.3"
		Seal Bar configuration	2 x 33" left/right	Seal Bar configuration	2 x 30.3" front/back with high lid (11.8")	Seal Bar configuration	2 x 33.5" left/right Add a 3 <sup>rd</sup> seal bar 43.3" front, center, back
Automatic lid	No	Automatic lid	No	Automatic lid	No	Automatic lid	Yes
Easy swing	No	Easy swing	No	Easy swing	No	Easy swing	Yes
Chamber Dimension L	15.7"	Chamber Dimension L	29.5"	Chamber Dimension L	32.7"	Chamber Dimension L	28.7"
Chamber Dimension W	24.4"	Chamber Dimension W	24.5"	Chamber Dimension W	33"	Chamber Dimension W	43.3"
Chamber Dimension H	9.4"	Chamber Dimension H	9.8"	Chamber Dimension H	10"	Chamber Dimension H	11"
Dimension L	32.2"	Dimension L	47.5"	Dimension L	51"	Dimension L	47.8"
Dimension W	58.6"	Dimension W	58.4"	Dimension W	74.8"	Dimension W	95.3"
Dimension H	53"	Dimension H	52.8"	Dimension H	57"	Dimension H	62.9"
Net Weight	683 lbs	Net Weight	1184 lbs	Net Weight	1510 lbs	Net Weight	1691 lbs
Approvals	cETLus	Approvals	cETLus	Approvals	cETLus	Approvals	cETLus

Electrical information available upon request. May vary with customizations.

Made in the Netherlands




OPTIONAL ADD-ONS







# Seal Bars Configurations




DIABLO 10




DIABLO 12




DIABLO 17D




DIABLO 20D




DIABLO 12D27G




KAZE 14




KAZE 16




KAZE 16XL




KAZE 16XLD




CHINOOK 14




CHINOOK 14+




CHINOOK 16+




CHINOOK 16D




CHINOOK 16D+




CHINOOK 20




CYCLONE 201D48




CYCLONE 203D




CYCLONE 203D+




PAMPERO 20D3




PAMPERO 30/20D3




PAMPERO 2-18D3




PAMPERO 2-22D3




SOLAR 20D3




SOLAR 30/20D3




SOLAR 41/24D3




SOLAR 2-24D3




SOLAR 2-24D3EW



SOLAR 2-33D3



SOLAR 2-43D3




SOLAR 2-24D3W







# Control panels

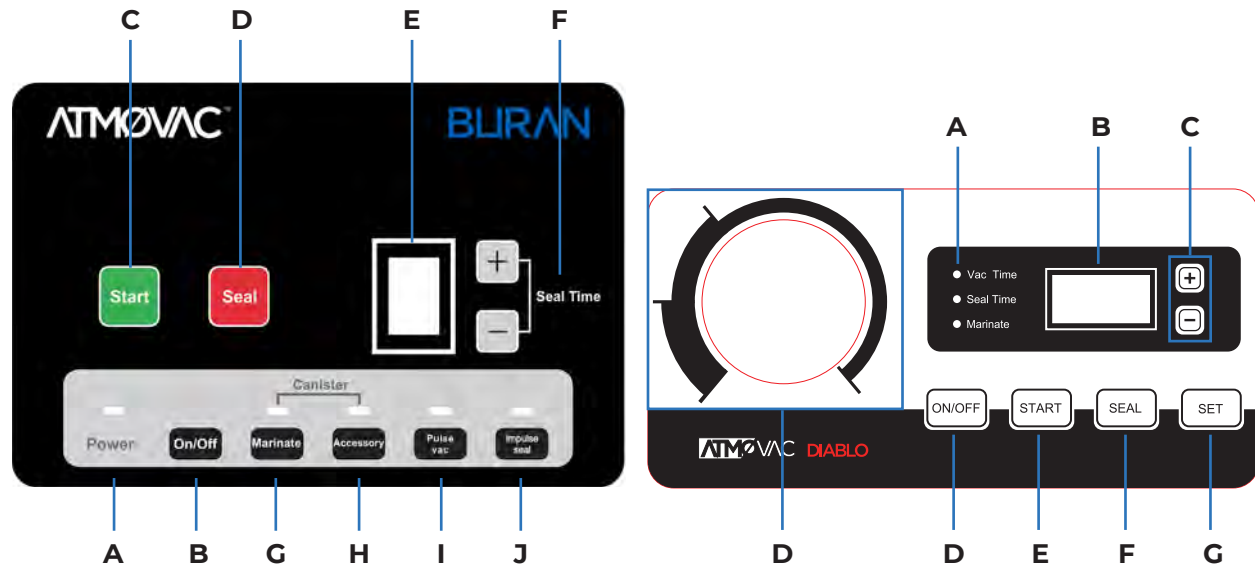


## BURAN

- A. **Power indicator light:** Light turns on when machine is ON.
- B. **ON/OFF button:** Turn the machine ON/OFF.
- C. **Start:** Starts the cycle according to selected parameters.  
There is a Quick-Start button on the handle of the machine, which executes the same function.
- D. **Seal:**
  - a. Seal bags without a vacuum cycle.
  - b. Interrupt the current function and proceed to sealing.
There is a Quick-Seal button on the handle of the machine, which executes the same function.
- E. **Digital display:** Displays vacuum cycle progress (0-9), seal time (0-6s), and (E) when an error occurs.
- F. **Seal Time:** Use the +/- buttons to increase/decrease the seal time.
- G. **Marinate:** Repeats the cycle of vacuuming and releasing air, allowing food items to get optimum marinade infusion.
- H. **Accessory:** When the external vacuum tube is plugged in, use Accessory mode with storage containers, vacuum bags, or wine bottle stoppers (must be equipped with valves).
- I. **Pulse vac:** Select Pulse mode. Use the Start button to control the vacuum function. It works while the button is held down and stops once it is released. You must manually start the seal function once the desired vacuum is achieved.
- J. **Impulse seal:** In this mode, you can simply close the lid to start the seal function without a vacuum cycle.

## DIABLO 10 & 12

- A. **Indicator lights:** Indicates which setting is selected for programming.
- B. **Digital display:** Shows vacuum, seal, and marinate times.
- C. **+ / - :** Cursor keys to increase/decrease values during programming.
- D. **ON/OFF:** Turns the machine ON/OFF.
- E. **START:** After closing the lid, if the appliance does not start automatically, press the "START" button to initiate the vacuum and seal process.
- F. **SEAL:** Interrupts current function and proceeds to sealing.
- G. **SET:** Press this button to enter programming mode for vacuum, seal, and marinating times.
- H. **Gauge:** Indicates pressure inside the vacuum chamber.



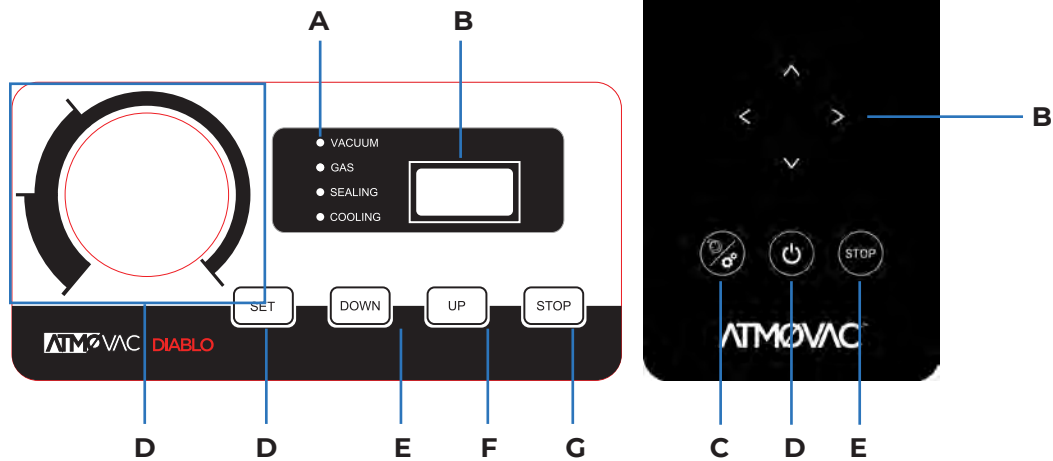


## DIABLO 17D, 20D & 12D27G

- A. **Indicator lights:**
- When light is solid, indicates which setting is selected for programming.
  - When light is flashing during a cycle, indicates which function is active.
- B. **Digital display:**
- During programming, displays current value of selected setting
  - During a cycle, displays time remaining for active function
- C. **SET:** Press this button to enter programming mode for vacuum, gas injection, sealing and cooling times.
- \*The Diablo17D model does not offer the gas inflation option; press the Set button to leave it at 0s.
- D. **UP/DOWN:** Increase/decrease time of current setting.
- E. **STOP:** Stops machine functioning completely
- F. **Gauge:** Indicates pressure inside the vacuum chamber

## KAZE


- A. **Graphic display:** The display shows all the available programs and settings. During a program, the display shows the current program cycle.
- B. **Cursor keys**
- C. **Pump cleaning program and Settings button:**
- A short press is used to activate the pump cleaning program.
  - A long press (3 seconds) is used to activate the settings menu.
- D. **On/Off button**

# Premium Control Panels

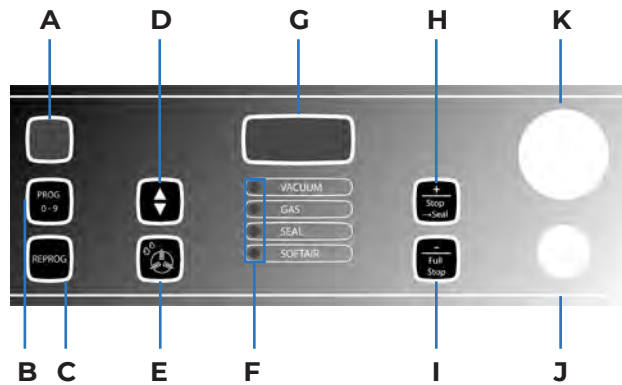

## STANDARD

- A. **Digital display:** Selected program number
- B. **Select desired program**
- C. **Enable programming mode**
- D. **Cursor key** (up/down)
- E. **Pump cleaning program**
- F. **Lights** indicate cycle phase or programming mode
- G. **Digital display:** Current value of active function
- H. 2 functions
  - a. **( + )** Increase parameter during programming
  - b. **Stop → Seal** Stop current process and proceed to sealing
- I. 2 functions
  - a. **( - )** Decrease parameter during programming
  - b. **Full Stop** Stop current program completely
- J. **ON/OFF button**
- K. **Gauge:** Indicates pressure inside vacuum chamber

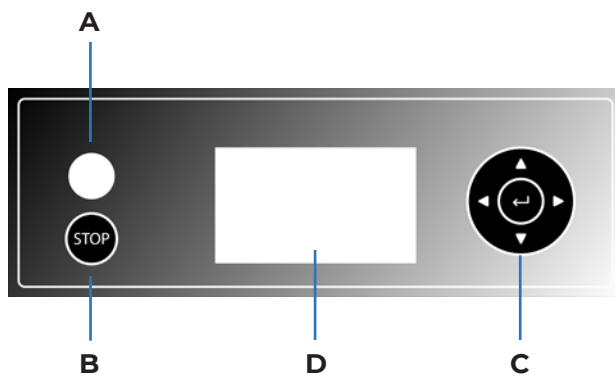

## ACS

- A. **ON/OFF button**
- B. **STOP button:** Stops current program immediately
- C. **Cursor pad**
- D. **LCD display**

### LCD Display

**Start-up mode:** Displays the current date and time when starting the machine. It also displays the installed software version. The user cannot take any action.

**Navigation mode:** Displays a program and its functions. The user can navigate through the various programs and view the current settings of each function.

**Setting mode:** The user can view and adjust all settings, provided the user is logged in as the owner.

**Cycle mode:** Once the machine starts a packaging cycle, animations of the functions are displayed along with the current value of the function.

### LCD Icons



**VAC+:** Continues the vacuum process momentarily, removing any air remaining in the bag once the set program is completed.



**Gas Flush:** MAP (Modified Atmosphere Packaging): A mixture of natural gases in carefully controlled proportions is added to the bag before sealing, reducing deterioration, protecting the shape of the product, and extending shelf life.



**Liquid control:** When the boiling point of the contained liquid is detected, the vacuum process stops and proceeds to sealing. No mess, no waste.



**Marinating:** Adding and removing air slowly and repeatedly forces the marinade into the pores of the food, resulting in increased absorption, flavour, and tenderness.



**Tenderize:** Keeping the vacuum chamber at a pre-determined vacuum level for a set length of time helps to tenderize or degas a product.



**Red meat:** Increase the longevity and retain the bright colour of your red meats. This function prevents degassing of the product during and after the sealing phase.



**Seal time:** Customize the seal time according to bag type and thickness.



**Sequential-vacuum:** Alternating vacuum and pause steps allow air trapped inside the core of a product to escape.



**Soft air:** Air is slowly reintroduced into the chamber before sealing, shaping the bag around the product and preventing delicate items from getting crushed.



**Label Printer:** Organize your stock room and get your products ready for market with a compact label printer synched to your vacuum machine.

Label options: name of the producer, name of the product, production date, shelf life, achieved vacuum, initials of the user, recommended storage temperature and an information field (for example to indicate the gas used)

# Accessories



**INCLINED SHELVES**  
**0307701 0307702 0307703**  
**0307704 0307707**

Use with your ATMOVAC premium vacuum machine when packaging liquids or powders to avoid spillage and ensure proper seal. Stainless Steel construction.

Warranty 3 months

SPECS —					
0307701		0307702		0307703	
Compatible with		Compatible with		Compatible with	
Arctic 11		Chinook 14 / 14+		Arctic 16 /16D, Chinook 16+, Oroshi	
Dimension L		Dimension L		Dimension L	
10.25"		12.25"		15.75"	
		0307704		0307707	
		Compatible with		Compatible with	
		Chinook 16D / 16D+		Cyclone 201D / 203D	
		Dimension L		Dimension L	
		14.75"		19"	



# LIQUID CONTROL KIT

## 0930120

Prevent liquids from boiling during the vacuum process. As soon as the boiling point is detected, the vacuum process stops and the bag is sealed, protecting the product, pump and vacuum chamber.

Compatible with All types of ATMOVAC Premium vacuum machines  
Can be installed at purchase or shipped separately.  
Professional installation required.

# GAS FLUSH KITS

## CH14 CH16 CY20

Add MAP (modified atmosphere packaging) capability to your ATMOVAC premium vacuum machine. It replaces the air in your packaging with an adapted gas suited for the preservation of your product, while avoiding atmospheric compression.

Can be installed at purchase or shipped separately.  
Professional installation required.

SPECS —		
Compatible with	CH14	CH16
	Chinook14	Chinook16D/D+
		CY20
		Compatible with Cyclone201/203D

SERVICE KITS

0940112 0940124 0940130

0940133 0940136

Everything you need in one package to keep your ATMOVAC premium vacuum machine running as it should. Average savings of 50% compared to buying parts individually. Covers 6 months of recommended maintenance.

SPECS —			INCLUDES
0940112	0940124	0940130	
Compatible with Chinook 14 /14+	Compatible with Arctic16	Compatible with Cyclone201D/203D	
	0940133	0940136	
	Compatible with Arctic16D, Chinook16D/D+	Compatible with Chinook16+	Original Synthetic Oil
			Teflon Isolation Tape
			Teflon Tape
			Seal Wire
			Lid Gasket



EXTERNAL VACUUM TUBE

0903100

0903101

Use this external adapter with ATMOVAC Premium vacuum machines to seal food in gastronorm containers. The product is protected from vacuum pressure and you can reuse the gastronorm containers endlessly. It is an ideal solution for cost saving and environmentally friendly food storage.

Warranty	3 months	SPECS —	
		0903100	
		Compatible with Arctic/Chinook	
		0903101	
		Compatible with Cyclone	



# LABEL PRINTERS

0930211 0930213

This ultra-compact “fits anywhere” printer optimizes packaging speed and efficiency. Use it to create high-quality labels, receipts, tags and wristbands.

## FEATURES


Compatible with ATMOVAC premium+ vacuum machines

- Direct Thermal Print Method
- 3 Button User Interface
- Five Status Icons (Status/Pause/ Data/Supplies/Network)
- Link-OS for unparalleled Ease of Management - Optional battery for Cordless Operation
- OpenACCESS™ for easy Media Loading
- ENERGY STAR Qualified
- Dual-wall frame construction
- Auto-detectable (PFC Compliant) 100-240VAC

## SPECS —

0930211		0930213	
Connection	Bluetooth and WiFi	Connection	USB 2.0 and USB Host
Dimension L	8.6"	Dimension L	8.6"
Dimension W	4.5"	Dimension W	4.5"
Dimension H	6.0"	Dimension H	6.0"
Net Weight	2.2 lbs	Net Weight	2.2 lbs
Approvals	Energy Star	Approvals	Energy Star



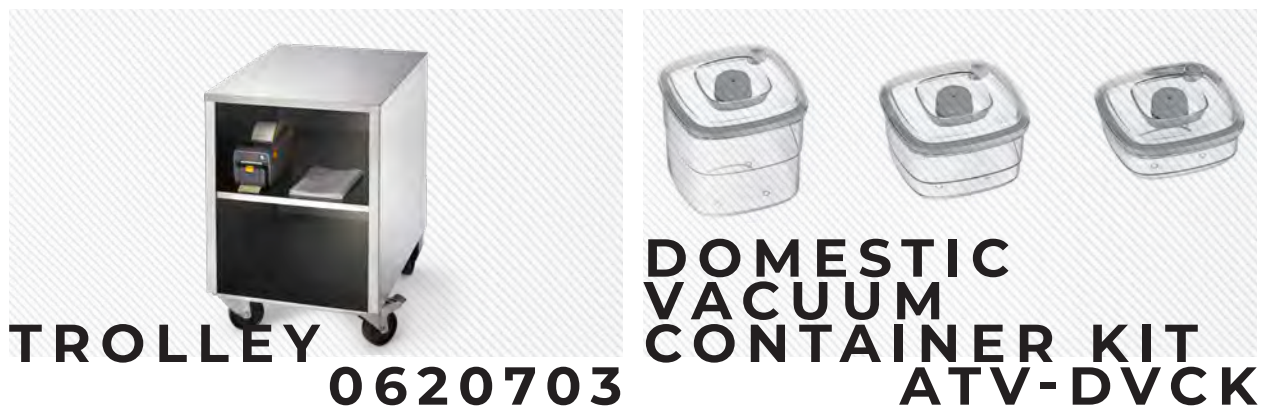

Liberate counter space and increase storage at your work station with this sturdy, compact stainless steel trolley with locking wheels.

ATMOVAC's ultimate food-safe storage solution for domestic applications.

SPECS — 0620703	
Dimension L	23.6"
Dimension W	19"
Dimension H	26.5"
Net Weight	37.4 lbs
Warranty 3 months	
Made in the Netherlands	

SPECS — ATV-DVCK	
Compatible with	Buran, Casa and Santa Ana
Dimension L	6.75"
Dimension W	6.75"
Dimension H	3" / 4.5" / 6.5"
Net Weight	0.7 lbs / 0.8 lbs / 1 lb
Approvals	BPA Free
Domestic use only.	
Suggested temperature range for storage: -4 to 158°F (-20 to 70°C). Must not exceed 5 minutes in the microwave at 158°F (70°C). Do not microwave oil.	
Warranty	3 months
Made in China	

FEATURES	INCLUDES
3 sizes: 800ml (0.2gal), 1.4L (0.4gal), 2L (0.5gal)	3 containers and 3 lids
Reusable	CONSTRUCTION
Easy to clean	
BPA Free	
Safe for use with: Dishwasher, Freezer & Microwave	
	Body (AS plastic)
	Seal (Silicone)
	Screw Cap (ABS)





# How to choose a vacuum bag

ATMOVAC vacuum bags are available in a variety of sizes and types and serve different purposes.

1. **Texture**

Depending on the type of machine you’re using, you will choose between channeled or smooth.

Channeled is for external and chamber vacuum. Smooth is for chamber vacuum only.



ATV**SB**90-XXXX

ATV**CB**90-XXXX

ATV**CBR**90-XXXX

**CB** = Channeled bag  
**SB** = Smooth bag  
**CBR** = Channeled roll

2. **Form**

Vacuum bag size is chosen according to seal bar length and available space inside the vacuum chamber. External vacuum machines pose less restrictions on bag length.

With rolls, use only the length you need. Using your vacuum machine, seal one open end, insert your product into the bag and then package.

CB100-0812  
SB90-1414

ATVCBR90-0820


Width (in)      Length (ft)

Width (in)      Length (in)






### 3. Use

 Storage: dry (20°C / 68°F), cold (3°C / 37°F), frozen (-18°C / 0°F)

 Cooling: blast chill (90 to 3°C / 197 to 37°F), blast freeze (90 to -18°C / 197 to 0°F)

 Cooking: sous-vide (24 to 115°C / 75 to 239°F), microwave (HIGH, max time)

### 4. Certifications

We go to great lengths to offer premium quality vacuum bags that meet the highest safety and ecological standards.

**BPA-free**



Santé  
Canada Health  
Canada



**ATVCB90**

Channeled bags	90 µm / 3.5 mil	PA/TIE/PE/TIE/PA/TIE/PE
Coextruded	-40 to 105°C (-40 to 221°F)	Cooking, Freezing, Storage
EZ-TEAR opening	FDA, BPA/Phthalate Free, TUV	External + Chamber Vacuum Machines

Bag Size	SKU	Packs per Case	Bags per Case
6" x 12"	ATVCB90-0612	15 packs	1,500 bags
8" x 12"	ATVCB90-0812	10 packs	1,000 bags
10" x 14"	ATVCB90-1014	10 packs	1,000 bags
10" x 18"	ATVCB90-1018	5 packs	500 bags
12" x 16"	ATVCB90-1216	5 packs	500 bags
14" x 18"	ATVCB90-1418	5 packs	500 bags
16" x 20"	ATVCB90-1620	5 packs	500 bags

**ATVSB90**

Smooth bags	90 µm / 3.5 mil	PA/TIE/PE/TIE/PA/TIE/PE
Coextruded	-40 to 105°C (-40 to 221°F)	Cooking, Freezing, Storage
EZ-TEAR opening	FDA, BPA/Phthalate Free, TUV	Chamber Vacuum Machines

Bag Size	SKU	Packs per Case	Bags per Case
6" x 8"	ATVSB90-0608	32 packs	3,200 bags
6" x 12"	ATVSB90-0612	20 packs	2,000 bags
8" x 10"	ATVSB90-0810	16 packs	1,600 bags
8" x 12"	ATVSB90-0812	16 packs	1,600 bags
10" x 14"	ATVSB90-1014	10 packs	1,000 bags
12" x 14"	ATVSB90-1214	8 packs	800 bags
12" x 16"	ATVSB90-1216	8 packs	800 bags
12" x 18"	ATVSB90-1218	7 packs	700 bags
14" x 16"	ATVSB90-1416	6 packs	600 bags
18" x 28"	ATVSB90-1828	3 packs	300 bags
20" x 36"	ATVSB90-2036	2 packs	200 bags

**ATVCBR90**

Channeled rolls	90 µm / 3.5 mil	PA/TIE/PE/TIE/PA/TIE/PE
Coextruded	-40 to 105°C (-40 to 221°F)	Cooking, Freezing, Storage
EZ-TEAR opening	FDA, BPA/Phthalate Free, TUV	External + Chamber Vacuum Machines

Roll Size	SKU	Rolls per Case	Packs per Case
8" x 20'	ATVCBR90-0820-2	60 rolls	30 packs
12" x 20'	ATVCBR90-1220-2	30 rolls	15 packs





# Sous-vide Cooking

Thermal immersion circulators by ATMOVAC are designed for precision and control. Their individual sizes and features make them suitable for a variety of applications. Delicate sous-vide cooking, precise rethermalization and controlled pasteurization processes are all possible with one product, enhancing food quality and extending product shelf life without sacrificing safety. They adapt to a variety of containers, prevent contact with air or water during use and save on energy consumption compared to an oven or gas stove.

Stainless Steel and Plastic  
Timer: 5 mins - 99 hrs

### SAFETY FEATURES

Dry-run protection, element protective cell and protection against overvoltage and overheating.

### FEATURES

- Temperature and Time Controls
- Adjustable Fixed Clamp
- Removable Filter for easy cleaning – **only for SV-PRO**
- Warranty 1 year parts and labor



### SPECS —

	SV-EZ	SV-PRO
Volts	120V	120V
Watts	900W	1200W
Amps	7.5A	9A
NEMA	5-15P	5-15P
Max. Volume Capacity	8 Gal / 30L	10.5 Gal / 40L
Temperature	41 - 198°F (5 - 92°C)	41 - 203°F (5 - 95°C)
Dimension L	2.7"	5.9"
Dimension W	4.7"	3"
Dimension H	13"	13.4"
Net Weight	1.87 lbs	2.9 lbs
Approvals	cETLus	cETLus



SV-310

SPECS

Volts	120V
Watts	1800W
Amps	15A
NEMA	5-15P
Max. Volume Capacity	13 Gal / 50L
Temperature	41 - 203°F (5 - 95°C)
Water Circulation Rate	2.5 Gal/min (10 L/min)
Dimension L	5.5"
Dimension W	6.75"
Dimension H	12.75"
Net Weight	5 lbs
Approvals	cETLus



Made in China

FEATURES

- Heavy-Duty Stainless Steel Housing
- Self-Diagnosis
- Temperature and Time Functions
- Adjustable Fixed Clamp
- Power-Saving Mode
- Auto shut-off
- Warranty

1 year parts and labor

Timer: 5 mins - 99 hrs 59 mins

SAFETY FEATURES

Dry-run protection, element protective cell and protection against overvoltage and overheating.



FEATURES

- Heavy-duty AISI 304 stainless steel construction
- Temperature and time controls
- Working temparture display
- 25 adjustable preset cooking programs
- Delayed start
- Adjustable fixed clamp
- Electro-polished coated spiral element
- Plastic coated stainless steel handle for convenience
- Auto shut-off
- Warranty 1 year parts and labor

Timer: 1 - 99 hrs

SAFETY FEATURES

Dry-run protection, element protective cell and protection against overvoltage and overheating.

SPECS — SOFTCOOKERXP 120

Volts	120V
Watts	1500W
Amps	12A
NEMA	5-15P
Max. Volume Capacity	11 Gal / 43L
Temperature	75 - 210°F (24 - 99°C)
Dimension L	10.25"
Dimension W	5"
Dimension H	15"
Net Weight	10 lbs
Approvals	CE

SPECS — SOFTCOOKERXP 230

Volts	220V
Watts	2000W
Amps	9A
NEMA	6-15P
Max. Volume Capacity	11 Gal / 43L
Temperature	75 - 210°F (24 - 99°C)
Dimension L	10.25"
Dimension W	5"
Dimension H	15"
Net Weight	10 lbs
Approvals	CE



SR-

23



11

Integrated baths for sous-vide by ATMOVAC offer excellent temperature stability and reliability.

SPECS —

	SR23		SR11
Volts	110V	Volts	110V
Watts	1150W	Watts	1700W
Amps	10.5A	Amps	15.5A
NEMA	5-15P	NEMA	5-20P
Max. Volume Capacity	5 Gal / 19L	Max. Volume Capacity	7.6 Gal / 29L
Temperature	84 - 210°F (29 - 99°C)	Temperature	84 - 210°F (29 - 99°C)
Compatible with	GN 2/3 Containers	Compatible with	GN 1/1 Containers
Dimension L	14.6"	Dimension L	14.6"
Dimension W	15.8"	Dimension W	22.6"
Dimension H	11.8"	Dimension H	11.8"
Net Weight	12 lbs	Net Weight	36 lbs
Approvals	cETLus, ETL Sanitation, NSF	Approvals	cETLus, ETL Sanitation, NSF

SPECIAL  
FEATURES

- Removable, perforated tray prevents contact between the heating element and food items
- Auto shut-off protects from dry-run and overheating
- Alarm and fault indicators



AISI 304 Stainless Steel Insulated Shell and Inner Container.


FEATURES

- Compact design with recessed handles
- Seamless high-quality stainless steel construction
- LED display (temperature and working time)
- Temperature accuracy up to 0.3°C/F
- Program up to 5 different recipes
- Drain valve
- Display in °C or °F
- Lid Included
- Warranty1 year parts and labor



# Impulse Sealers

Enjoy the simplicity and durability of the ATMOVAC Impulse Sealers. Rapidly and hermetically pack your sweets, food products, general goods, stationery articles and other products.

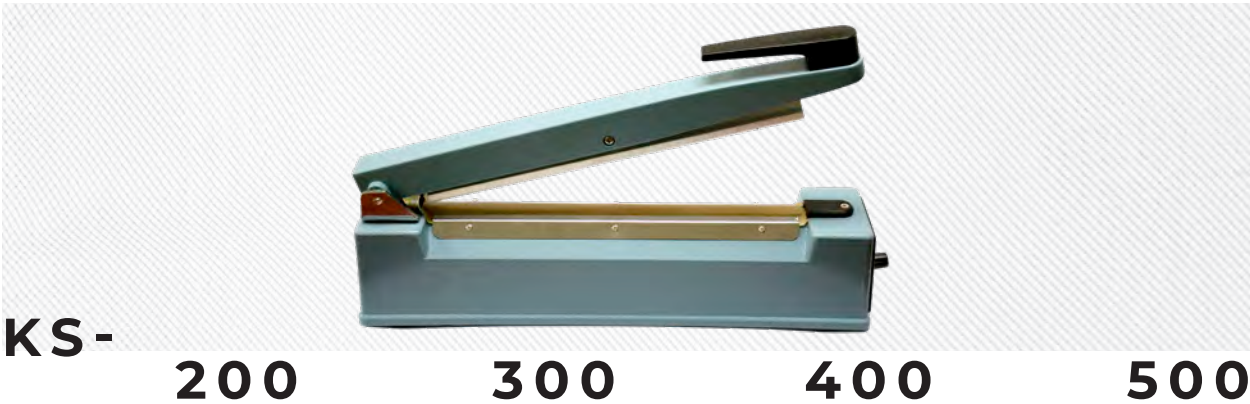

## FEATURES

8 temperature settings for different types and gauges of plastic

Compact Design

Strong water-tight seal

Low energy consumption

Long-lasting

Warranty 1 year parts and labor

Compatible with PA/PE plastic bags.



## SPECS —

	KS-200		KS-300		KS-400		KS-500
Volts	120V	Volts	120V	Volts	120V	Volts	120V
Watts	310W	Watts	400W	Watts	600W	Watts	800W
Amps	2.6A	Amps	3.3A	Amps	5A	Amps	6.7A
NEMA	5-15P	NEMA	5-15P	NEMA	5-15P	NEMA	5-15P
Seal Bar	7.75"	Seal Bar	12"	Seal Bar	15.75"	Seal Bar	19.5"
Dimension L	12.7"	Dimension L	17.6"	Dimension L	22"	Dimension L	25.4"
Dimension W	3"	Dimension W	3.4"	Dimension W	3"	Dimension W	3.4"
Dimension H	5.7"	Dimension H	6.5"	Dimension H	6.5"	Dimension H	6.5"
Net Weight	6 lbs	Net Weight	10 lbs	Net Weight	12 lbs	Net Weight	16.5 lbs
Approvals	CE	Approvals	CE	Approvals	CE	Approvals	CE

Made in China

KS-FS-



350450600

FEATURES

- Sturdy construction
- Hands-free operation
- Quick and easy installation
- Temperature 180°C / 356°F
- Adjustable seal time for different bag thicknesses (1 - 10 sec.)
- Warranty1 year parts and labor

Compatible with PA/PE plastic bags

SPECS —

	KS-FS-350	KS-FS-450	KS-FS-600
Volts	110V	110V	110V
Watts	1250W	1200W	1500W
Amps	5.7A	5.5A	6.8A
NEMA	5-15P	5-15P	5-15P
Seal Bar	13.75"	17.75"	23.5"
Dimension L	17.75"	21.75"	27.5"
Dimension W	20"	20.5"	22.5"
Dimension H	34.5"	34.5"	34.5"
Net Weight	70.5 lbs	75 lbs	82.5 lbs
Approvals	CE	CE	CE





## KW - 450

Widely used in supermarkets, hotels and restaurants, this machine will help you quickly and easily wrap your food products for storage or display.

### FEATURES

Simple and easy controls

Stable base with non-slip feet

Rugged construction for long-lasting durability

Standard size hot plate with removable non-stick cover (15.5 x 5")

Warranty 1 year parts and labor

Compatible with Shrink Wrap rolls up to 18" wide, 6 - 7.75" Ø

### SPECS

Volts	110V
Watts	350W
Amps	3.2A
NEMA	5-15P
Dimension L	23"
Dimension W	19.5"
Dimension H	4.5"
Net Weight	14 lbs
Approvals	CE



# Get the most out of your ATMOVAC machines

Use them in combination with Eurodib products to maximize your kitchen's potential

## Gelato, from start to finish


1. Prepare your favorite gelato base
2. Pack it using an ATMOVAC vacuum machine



**Chinook 14**  
ATMOVAC  
Premium vacuum sealer  
Pg. 15



3. Pasteurize it with an ATMOVAC softcooker



**SV-310**  
ATMOVAC Softcooker  
Pg. 40



4. Chill it with a Eurodib blast chiller



**BCB 10US**  
Gemm Blast Chiller



5. Store it.



6. Make it with Nemox Ice cream & gelato machine



**Crea 12K**  
Nemox Ice Cream &  
Gelato Machine



7. Freeze it with a Eurodib blast chiller



**Ecoblast 620**  
Eurodib Blast Chiller




8. Store it in a Gemm ice cream & gelato cabinet



**ARG30**  
Gemm Ice Cream & Gelato  
Storage Cabinet



9. Serve it

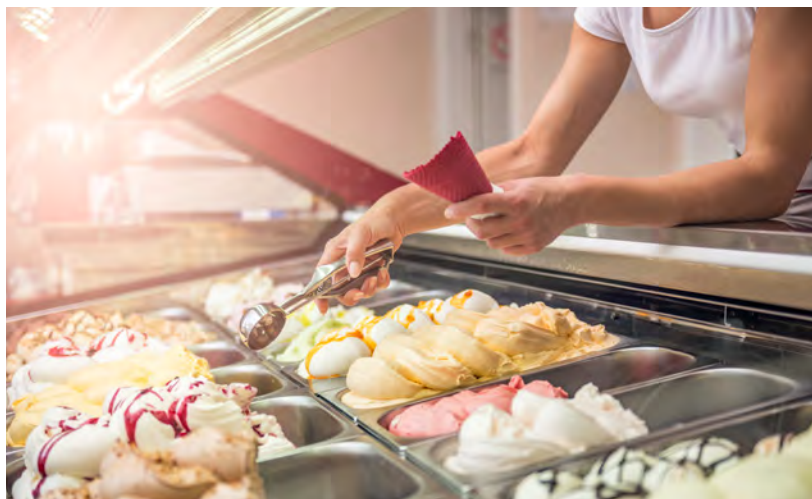

## Tips & Best Practices

- Food items must always be cooled to 4°C / 37°F before vacuum packaging.
- Marinate + cook sous-vide + sear, baste on grill.
- Liquids: do not overfill bag before sealing.
- Blanch vegetables before packaging to maintain colour and freshness.
- Protect delicate items for cold storage by blast freezing before packaging.
- Always follow recommended temperatures for handling food to ensure quality and safety.
- Regular maintenance will keep your vacuum machine working at its optimal performance. Premium vacuum machines come equipped with a pump cleaning program, which is recommended to be run every 2 days.

Refer to page 32 for ATMOVAC service kits with OEM parts, or contact our Parts Department for any additional requirements for maintenance or repair.

## ATMOVAC Academy

New to sous-vide?

Looking to drive sales?


Need advice on integrating sous-vide into your business?

Want to improve your product knowledge?

### We can help.

Interactive online training sessions available for groups or individuals, in English and/or French.

Scan the QR code below or visit [www.eurodib.com/request-training](http://www.eurodib.com/request-training) to schedule your personalized ATMOVAC training session today!



**Toll-Free: 888-956-6866**



## Our Representatives

### Canada

**ALEX DUMAINE**

514-968-5870 | alex@eurodib.com

### Alberta

**STEVE MACKELL**

403-281-8540 | smackell@telusplanet.net

### Manitoba

**CATHERINE YEREX**

514-968-5751 | cath@eurodib.com

### Québec

**CLAUDE BOURGEOIS**

514-212-1512 | cbourgeois@eurodib.com

**MARIE-ÈVE TREMBLAY**

514-996-4724 | metremblay@eurodib.com

### Ontario

**LITO ARMADA**

647-545-9565 | lito@eurodib.com

**MARIE-ÈVE TREMBLAY (OTTAWA)**

514-996-4724 | metremblay@eurodib.com



120, De La Barre Street, Boucherville, Québec J4B 2X7

Toll free: 1-888-956-6866 | customerservice@eurodib.com

**eurodib.com**

Follow us!



2025.10