

SAP 020 PR

MODEL

SPIDOGLOSS SAP020PR

- | | |
|--|--|
| <ul style="list-style-type: none"> • Upper Black Ribbed surfaces • Lower Black smooth surfaces | <ul style="list-style-type: none"> • Max. temperature 752 °F |
| <ul style="list-style-type: none"> • Manual Control | <ul style="list-style-type: none"> • Glass ceramic |



DESCRIPTION

Professional Contact Cooking System with Glass Ceramic plates, suitable for cooking a wide array of different foods, as such: toast, sandwich, meat, fish, vegetables, eggs, etc. High quality cooking result thanks to heat distribution uniformity and use of shock resistance, non-stick, non-porous and impermeable to smells and tastes Glass Ceramic Cooking Surfaces.

High versatility of use thanks to **SHB™ Plus** technology which allows combined heating (contact + infrared) and high cooking Temperature setting.

Up to 60% saving in Preheating Time thanks to **SHB™ Plus**. Up to 60% saving in Energy consumption thanks to the **Protek.Safe™** high efficiency insulation system which eliminates unnecessary energy loss.

STANDARD COOKING FEATURES

SETTINGS:

- Manual Control
- Temperature set: 248 °F – 752 °F.

PROGRAMS:

- Time and Temperature Values storing

ACCESSORIES

- **METAL SCRAPER**
Metallic scraper for Glass Ceramic Surfaces (included)
- **SPIDO CLEAN SPRAY DETERGENT**
750 ml Spray Detergent for Glass Ceramic and Steel Surfaces (to be purchased separately)


STANDARD TECHNICAL FEATURES

- **Double Upper Black Ribbed Glass Ceramic cooking plate:**
n°2 9 4/5"x9 4/5" in
- Stainless Steel Case
- Ergonomic Handle
- Self-looking Handle Bracket
- 4 Non-Slip Feets
- Removable Dip Tray
- ON/OFF button and LED light



SAP 020 PR

Views
Connection positions
Dimensions and Weights
Installation requirements
Power supply

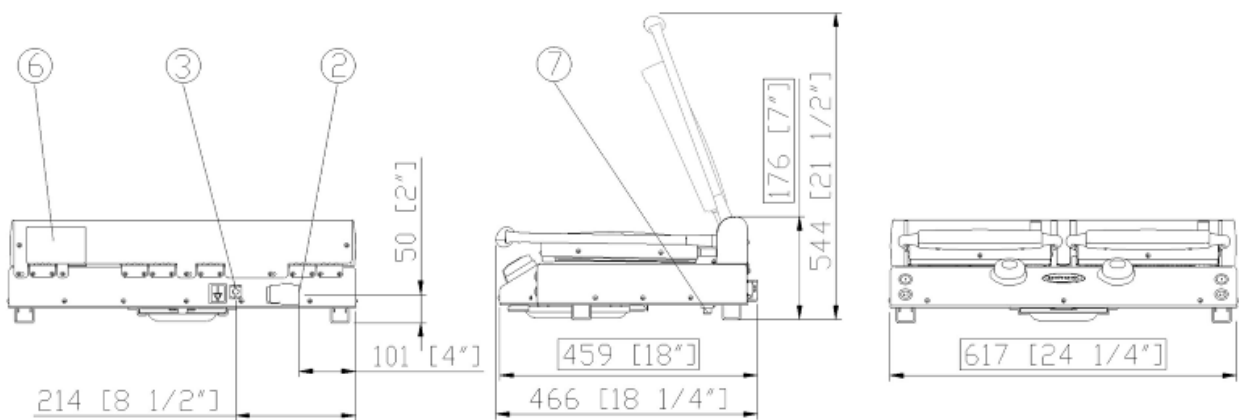

CONNECTION POSITIONS

2	Terminal board power supply
3	Unipotential terminal
6	Technical data plate
7	Safety thermostat

DIMENSIONS AND WEIGHT

Width	24 1/4"
Depth	18"
Height	7"
Net Weight	37,5 lb

INSTALLATION REQUIREMENTS

Installations must conform to all local electrical systems, specifically minimum wire gauge required for field connection, hydraulic and ventilation codes.


POWER SUPPLY

	STANDARD
Voltage	240 V
Phase	1PH+N+PE
Frequency	60 Hz
Power	2,7 kW
Maximum Amp Draw	12,3 A
Power cable requirement	SJTO 3 x AWG14
Plug	NEMA 6-15P

SAP 020 PR

Wiring diagrams

SAP 020 PR

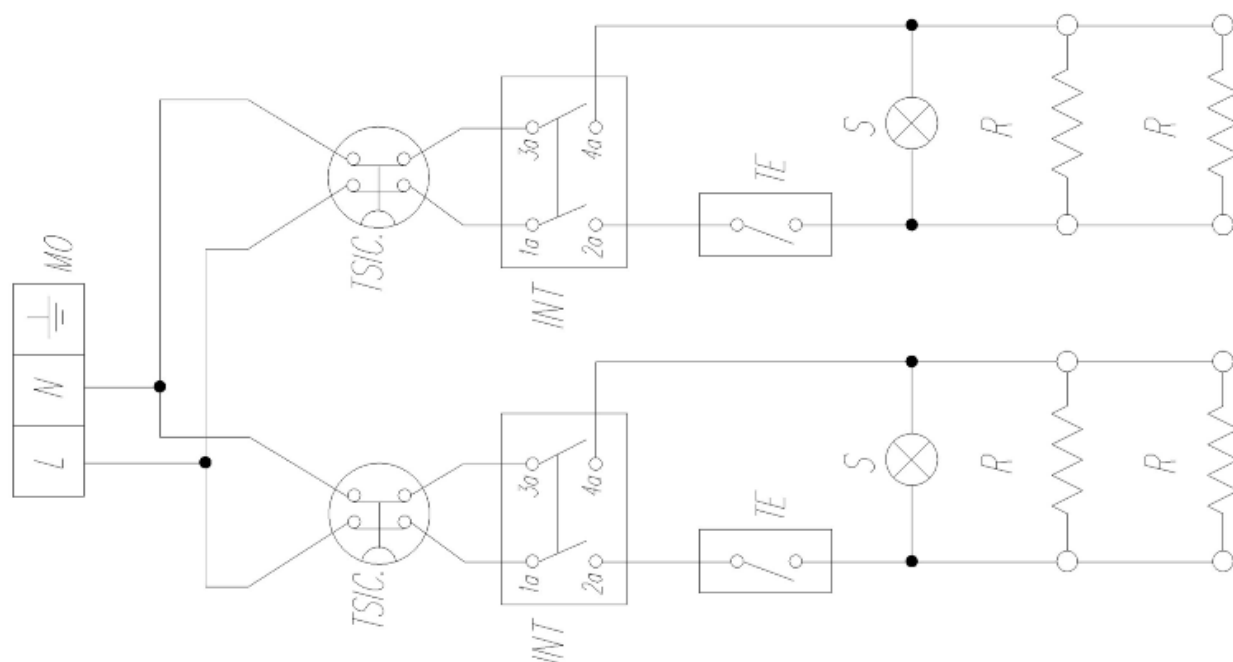

WIRING DIAGRAMS

INT	Switch
MO	Terminal board
R	Heating element
S	Pilot light
TE	Thermostat
TS	Safety thermostat